


## SPECIFICATIONS – Signature Control

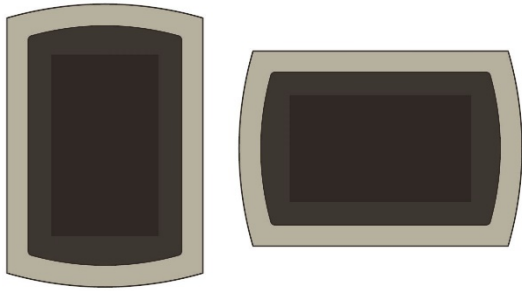

Construction.....Black Acrylic or 6061 Aluminum  
 Display.....5" Capacitive Touch screen  
 Display Full Color.....16.7M  
 Display resolution.....480 x 800  
 Interface.....Single Touch

### Signatouch Series operational features:

- **Digital Shower**
  - Operates flow, temperature, and output
- **Steam Shower**
  - Operates time, temperature, and auto powerflush
- **Light Sound and rainhead**
  - Control linked Bluetooth device
  - Control moodlight, shower light, and chromatherapy.

### Signatouch Series features:

- Can be mounted vertically or horizontally
- 2 user settings
- Day clock
- 16 finishes

### Installation Notes:

The control should be installed 60" inches from the floor of the shower, inside the shower only, and away from the steam head.

### Product Specification:

The user interface control shall be 5.6" x 3.5" x 0.65" in dimension. The Control shall be made from black acrylic(-BK,-WHT) or billet aluminum (Other Finishes) and includes the ability to operate and control: Smart Steam, Fast Start, Auto PowerFlush, Light and Sound System. By using a 100% networked digital technology.

### Finish Chart:


If selecting "WHT" or "BK" finish replace -xx with code in part number STC-xx. All other finishes replace the -xx in part number STCU-xx.

PC = Polished Chrome  
 SC = Satin Chrome  
 PB = Polished Brass  
 SB = Satin Brass  
 AB = Antique Brass  
 COP = Polished Copper  
 ACOP = Antique Copper  
 MB = Matte Black

PN = Polished Nickel  
 SN = Satin Nickel  
 BN = Black Nickel  
 AN = Antique Nickel  
 PG = Polished Gold  
 ORB = Oil Rubbed Bronze  
 WHT = White  
 BK = Black

### Shipping Information:

Weight.....1.25 lbs.  
 Length.....9.5 in.  
 Width.....6.5 in.  
 Height.....2.5 in.

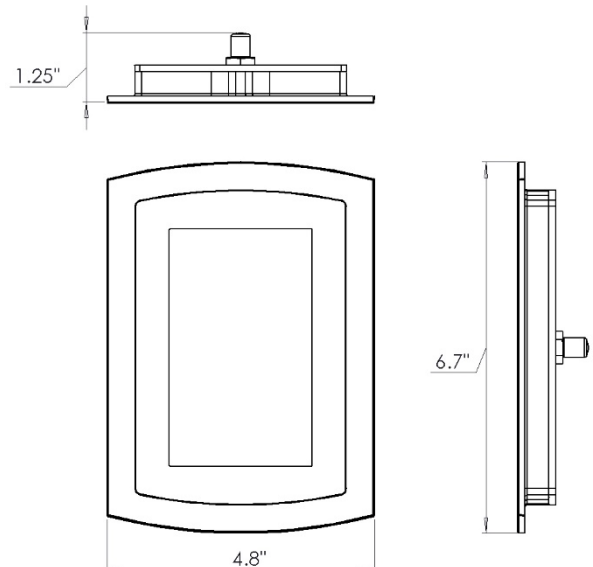

For any further assistance please contact ThermaSol at  
 800.776.0711 or [sales@thermasol.com](mailto:sales@thermasol.com)

Visit [www.thermasol.com](http://www.thermasol.com) for a complete product definition



## SPECIFICATIONS – SteamVection Steam Head

Construction..... Brass  
Aromatherapy..... Integral Reservoir

### Installation Notes:

The steam head should be installed 24 inches from the floor, and 6 inches from any corner, inside the shower only, and as far away from the controller and shower fixtures as possible.

The steam head housing requires a 1-1/8" hole in the shower wall, and must be flush with the finished wall and sealed to the wall to not allow vapor or water behind it. Use 1/2" copper fittings to attach the housing to the steam outlet. See the full steam head housing instructions within your generator installation guide.

### Product Specification:

The steam head shall be approximately 1.75" x 1.75" in the square version, and a 1.75" Dia. For the round version. The steam head is made from brass alloy and includes an aromatherapy well.

### Finish Chart:


Select desired finish and replace XX with code. No-Touch Aromatherapy steam head and control finishes.

|                       |                         |
|-----------------------|-------------------------|
| PC = Polished Chrome  | PN = Polished Nickel    |
| SC = Satin Chrome     | SN = Satin Nickel       |
| PB = Polished Brass   | BN = Black Nickel       |
| SB = Satin Brass      | AN = Antique Nickel     |
| AB = Antique Brass    | PG = Polished Gold      |
| COP = Polished Copper | ORB = Oil Rubbed Bronze |
| ACOP = Antique Copper | WHT = White             |
| MB = Matte Black      |                         |


### Shipping Information:

Weight..... 1 lbs.  
Length.....9.5 in.  
Width.....3.5 in.  
Height.....2.5 in.

For any further assistance please contact  
ThermaSol at 800.776.0711 or  
[sales@thermasol.com](mailto:sales@thermasol.com)

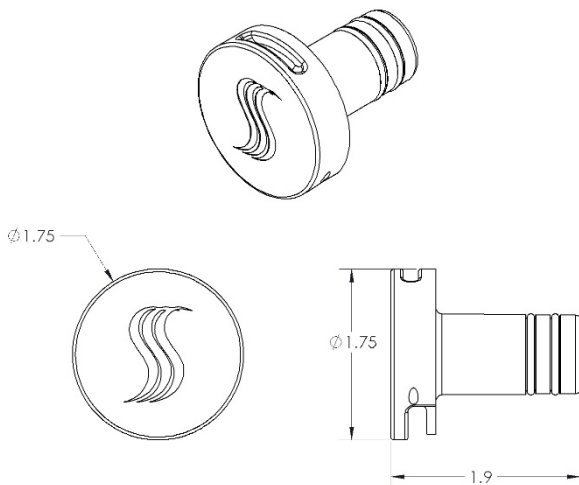

Round Style

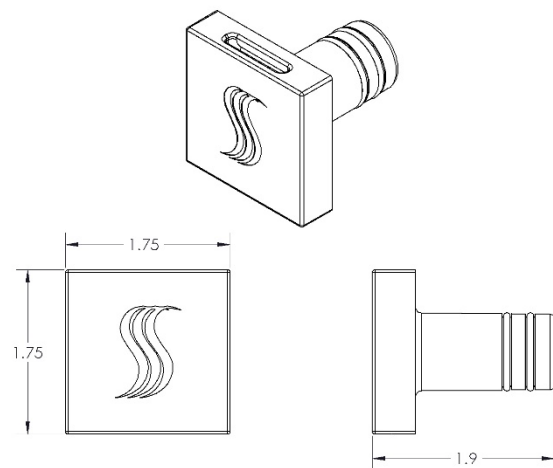

Square Style